
Equipment


For new production



- magnetic impression posts for X- and Z-Line (for K-Line the denture magnet is used)
- the magnetic laboratory replicas for all product lines

Torque wrench adapters

for screwing in the magnetic inserts



- for all product lines
- suitable for all common torque wrenches

Positioning cuffs

Chairside for installation or retrofitting


- Protection from fastening plastic
- for 0.3 mm resilience distance (additional resilience ring for K-Line)



Further products

Root cap magnets

For moulded root caps: Root residues simply and quickly as an additional retaining element

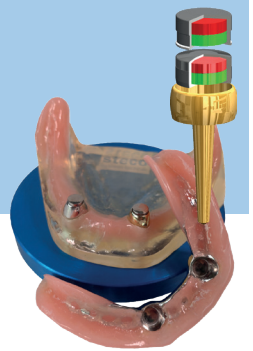


Magnetic extrusion

For decapitated teeth: carefully crown-lengthening



StecoGuide

Precise implant planning: Drill sleeves for every case




Please contact us at info@steco.de

steco-system-technik GmbH & Co. KG
Kollaustr. 6 • 22529 Hamburg • Germany
Tel. +49 40 55 77 81-0• www.steco.de/en

K.00.50.EN04 (03.2025)

steco system-technik

Magnetic attachments

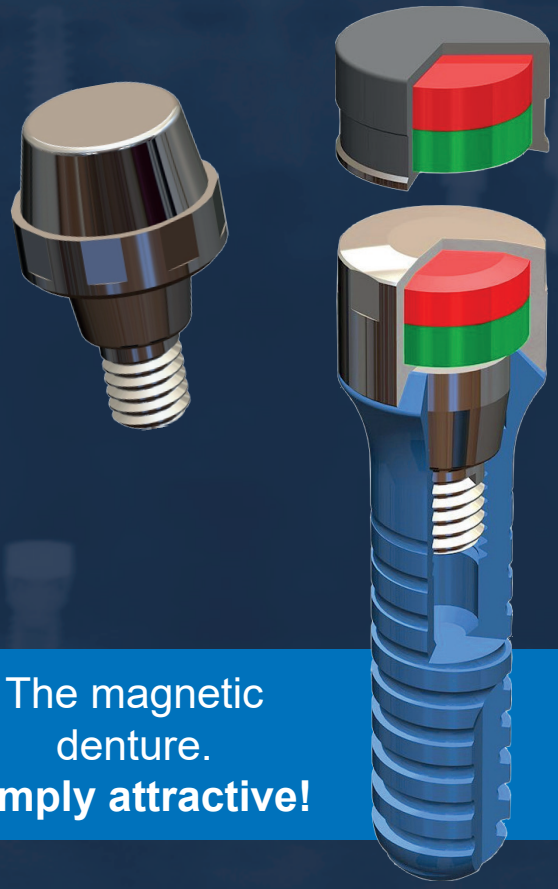

The magnetic denture.
Simply attractive!

Titanmagnetics®


Titanmagnetics® X-Line and Z-Line K-Line

Dual magnetic system

Two active, corrosion-resistant magnets, laser-welded into titanium, attract each other over a longer distance than monomagnet systems.


Denture magnet

Is glued into the denture.



Magnetic insert

Is screwed directly into the implant.

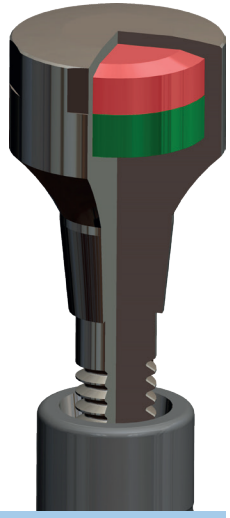


Advantages

- fast chairside treatment possible
- simple conversion of locators or ball heads
- no matrix exchange necessary
- strong divergences can be equalized
- suitable for upper and lower jaw


Product lines

There are different shapes and strengths.

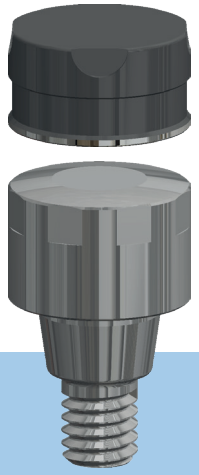

Spherical magnets

- slightly curved surface
- self-centring
- minimal lateral force transmission into the implant
- particularly suitable for short implants
- X-Line, ø 4.8 mm, withdrawal force 1.6 N
- Z-Line, ø 5.8 mm, withdrawal force 3.0 N

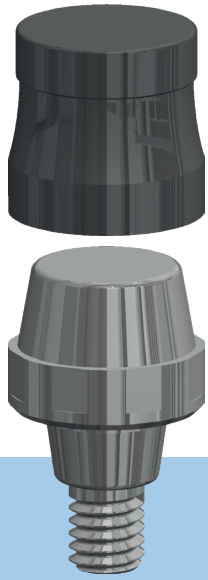

Conical magnets


- conical shape with 10°
- up to 15° convergence or divergence can be compensated
- stabilizes prosthesis against lateral displacement
- minimum implant length of 12 mm is recommended
- K-Line, ø 5.2 mm, withdrawal force 1.6 N

For more information, visit www.steco.de/en



Zubehör

Für eine Neuanfertigung




- magnetische Abformpfosten für X- und Z-Line (bei K-Line wird der Prothesenmagnet verwendet)
- magnetische Modellimplantate für alle Produktlinien

Ratscheneinsätze

zum Einschrauben der Magnet-Inserts

- für alle Produktlinien
- geeignet für alle gängigen Drehmomentschlüssel



Positionsmanschetten

Chairside für Einbau oder Umrüstung


- Schutz vor Befestigungskunstoff
- für 0,3 mm Resilienzabstand (zusätzlicher Resilienzring für K-Line)



Weitere Produkte

Wurzelkappenmagnete

Für gegossene Wurzelkappen: Wurzelreste einfach und schnell als zusätzliches Halteelement einbeziehen

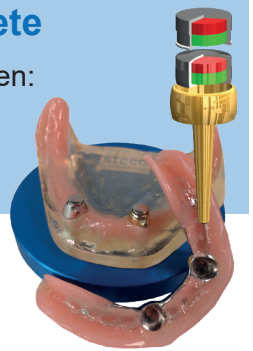


Magnetische Extrusion

Bei dekapierten Zähnen: schonende Kronenverlängerung



StecoGuide

Präzise Implantatplanung: Bohrhülsen für jeden Fall




Rufen Sie uns gerne an!
Telefon +49 40 - 55 77 81-0

steco-system-technik GmbH & Co. KG
Kollaustr. 6 • 22529 Hamburg • Deutschland
E-Mail: info@steco.de • www.steco.de

K.00.50.DE04 (03.2025)

steco
system-technik

Magnetattachments

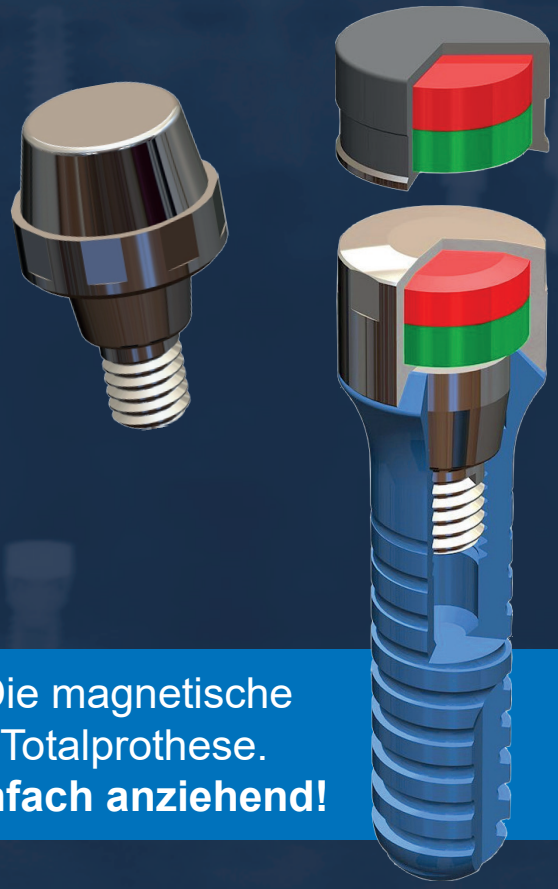

Die magnetische Totalprothese.
Einfach anziehend!

Titanmagnetics®


Titanmagnetics® X-Line und Z-Line K-Line

Bi-Magnetsystem

Zwei aktive, korrosionssichere Magnete, laserverschweißt in Titan, ziehen sich über eine längere Distanz an als Monomagnetsysteme.


Prothesenmagnet

Wird in die Prothese eingeklebt.



Magnet-Insert

Wird direkt in das Implantat eingeschraubt.

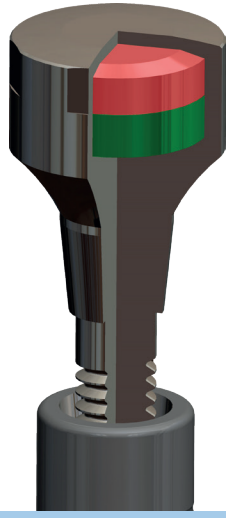


Vorteile

- schnelle Chairside Versorgung möglich
- einfaches Umrüsten von Locatoren oder Kugelköpfen
- kein Matritzentausch erforderlich
- starke Divergenzen ausgleichbar
- für Ober- und Unterkiefer geeignet


Produktlinien

Erhältlich in verschiedenen Formen und Stärken.

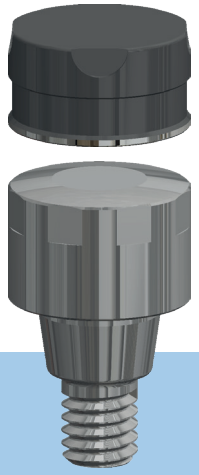

Sphärische Magnete

- leicht gewölbte Oberfläche
- selbstzentrierend
- geringste seitliche Krafteinleitung in das Implantat
- besonders für kurze Implantate geeignet
- X-Line, ø 4,8 mm, Abzugskraft 1,6 N
- Z-Line, ø 5,8 mm, Abzugskraft 3,0 N

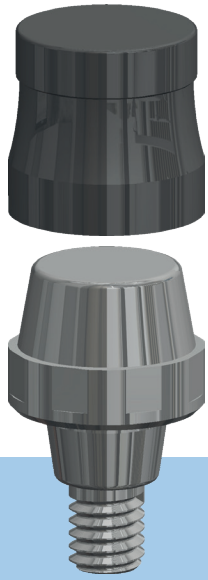

Konische Magnete

- konische Form mit 10°
- bis zu 15° Konvergenz oder Divergenz ausgleichbar
- stabilisiert Prothese gegen seitliche Verschiebung
- Mindestlänge des Implantates von 12 mm wird empfohlen
- K-Line, ø 5,2 mm, Abzugskraft 1,6 N

Weitere Informationen unter www.steco.de

